











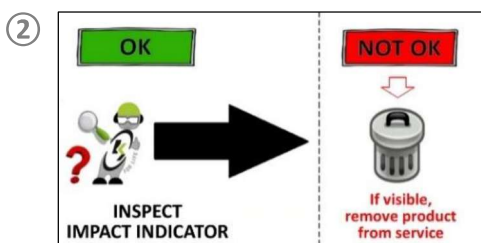

FA 30 823 15

P. 1 | 2



HS CODE
63079098
CARTON SIZE / PCS.
80 x 40 x 24 cm / 10
AET N°2777/10960-03/E07-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/140003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 30 823 15
LG. (MIN./MAX.)  KG	1.2 m / 1.5 m (connectors included)
CE	EN 355:2002
MAT.	 30 mm  PES
	45 mm
	 QUARTER/ DOUBLE ACTION
	YES
+	PPE-R 11.062. PPE-R 11.074, PPE-R 11.063  x1 109 mm rebar hooks
	2.55 KG



Largeur de l'absorbeur d'énergie
Width of the energy absorber
Ancho del absorbedor de energia
Larghezza del assorbitore di energia
Breite des Falldämpfers
LG.



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteur haut / connecteur bas
Material of top connector / bottom connector
Material conector alto / conector bajo
Materiale connettore alto / connettore basso
Material oberes / unteres Verbindungselement



Homologué pour le travail à proximité d'arêtes vives
Approved for work near sharp edges
Homologado para trabajo cerca de aristas vivas
Omologato per lavoro in prossimità di spigoli vivi
Zugelassen für Arbeiten in der Nähe scharfer Kanten